


Quick Installation Setup Guide:

Key Benefits

- Available in seven different finishes
- Water and tamper-resistant face
- Compact shallow design minimizes space in a cabinet
- Complies with UL 498 spill test
- Easy push-down function to pop up, rated for a minimum of 10,000 cycles (OPEN/CLOSE)
- Permanent installation ready (suitable for MC cable or non-metallic sheath cable)

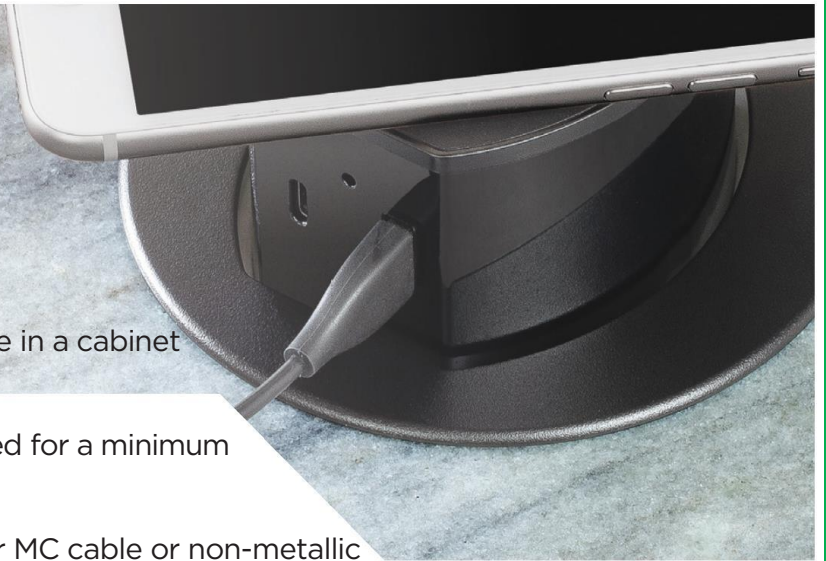

Installing the Countertop Power Receptacle or TriPower

Before installing the [Bryant Countertop Receptacles](#).

Note: Different components will be used throughout the installation. This includes the housing, base, countertop flange, receptacle cover, locking nut, and installation screws.

General Information

- 1). **Notice:** For installation by a qualified electrician in accordance with the national and local electrical code and the following instructions.
- 2). **Caution: RISK OF ELECTRICAL SHOCK.** Disconnect power before installing.
- 3). **Notice:** For indoor use only.
- 4). Check that the device's type and rating are suitable for the application.
- 5). Refer to PD2909 for complete instructions and warnings.



Step 1

Cut in the countertop a circular hole 4.00" to 4.16" in diameter. Then, determine what color silicon top to use, peel off the protective tab to expose the adhesive surface on the pop-up tower, snap on that cover.

For black color RCT600BK & RCT620BK and white color RCT600W & RCT620W, skip this step, go to step 2 and start installing.



Step 2

Remove the base from the housing to expose the screw terminals.



Step 3

CAUTION:

Before handling the cable, make sure the circuit is OFF.

Place the tightening ring on the cable whip before wiring the device. Feed the cable through the lock nut under the countertop, as this will secure the device later. Fasten the metal jacket to the device base. A fitting will be required (not included).

If using non-metallic sheath cable (Romex®), use the strain relief built into the base of the unit. If other cable is used, a knockout is available for placement of the appropriate fitting, as required by the installer.



Step 4

Strip power wires to the correct length as shown on in picture of the device.

Ground the base by bonding the green or bare wire to the grounding screw on the base.



Step 5

Terminate the green or bare wire to the green screw marked ground termination symbol. Terminate the white or gray wire to the white screw marked "WHITE" and the black or red wire to the brass screw marked "HOT".



Step 6

Reattach the base to the housing and secure it with screws.



Step 7

Insert the device into the countertop opening and hand-tighten the lock nut to secure the device in place.



Step 8

Terminate the device to the power source. Press the cover to pop up the receptacle to use, press again to close.

