


Silhouette™ Lighted Mirror

Product Specifications: Residential

ELECTRIC MIRROR®

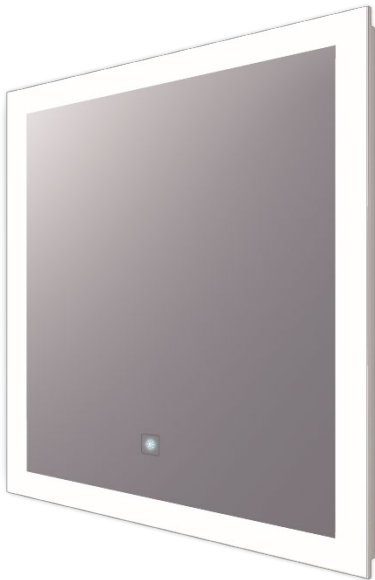

PRODUCT DESCRIPTION

An illusion of free-floating reflection merges seamlessly with resplendent light to create the perfect Silhouette™. With practical task lighting and soft wall glow, this beautiful lighted mirror will illuminate your bathroom in brilliant splendor.

SPECIFICATION STATEMENT

Solution shall consist of a lighted mirror with forward-facing task lighting as well as wall-glow ambient lighting around the mirror. Mirror shall have corrosion-resistant glass and have uniform light output in frosted areas, using dimmable, replaceable LEDs with greater than or equal to 90 CRI (color rendering index). Product will be made in USA and have a 7-year limited warranty.

THE ELECTRIC MIRROR ADVANTAGE

- ☑ Global mirror technology leader for over 20 years
- ☑ More installations than all competitors combined
- ☑ Realistic warranty you can believe in and trust
- ☑ Lowest total cost of ownership
- ☑ U.S. based customer service support
- ☑ 125,000 square foot American manufacturing facility

FEATURES AND BENEFITS

- Copper-free, corrosion-resistant DuraMirror™ glass
- Forward-facing task lighting
- Wall-glow ambient lighting with diffuser for a finished side view
- Environmentally sustainable
- Energy efficient
- Fast lead times
- Easy installation
- Title 24 compliant
- 7-year limited warranty
- Covered by one or more patents
- Proudly made in the USA

AVAILABLE OPTIONS

- Keen™ SmartDim™ Technology¹
- Custom sizes

LIGHTING SPECIFICATIONS

- Natural-looking LED light color
- Forward-phase, dimmable, replaceable LEDs
- CRI: 90+
- CCT: 3,000 Kelvin
- 695 lumens per foot
- Calculated L₇₀ 52,000-hour LED lifespan
- Maximum 100 lumens per watt efficacy

SAFETY SPECIFICATIONS

- Entire assembly meets UL/cUL standards
- International certifications
- Safety-backed mirror

INSTALLATION SPECIFICATIONS

- 120V-240V hardwire electrical connection; provide 36" whip; junction box not required
- Chassis should be mounted to wall studs; mounting holes are provided
- For Silhouette without Keen, fixture can be controlled by an on/off switch or forward-phase dimming switch
- For Silhouette with Keen, fixture can be controlled by an on/off switch or by using Keen touch control, located on the mirror 5" up from the bottom border

¹ See technology specification sheets for more information.

MODELS

Base Model	Base Model with Keen	Dimensions	Power Requirements
SIL-2436	SIL-2436-KG	24"W x 36"H x 1.75"D (610mm x 914mm x 44mm)	120/240 VAC, 67W
SIL-3030	SIL-3030-KG	30"W x 30"H x 1.75"D (762mm x 762mm x 44mm)	120/240 VAC, 67W
SIL-3042	SIL-3042-KG	30"W x 42"H x 1.75"D (762mm x 1067mm x 44mm)	120/240 VAC, 85W
SIL-3636	SIL-3636-KG	36"W x 36"H x 1.75"D (914mm x 914mm x 44mm)	120/240 VAC, 76W
SIL-4242	SIL-4242-KG	42"W x 42"H x 1.75"D (1067mm x 1067mm x 44mm)	120/240 VAC, 100W
SIL-4836	SIL-4836-KG	48"W x 36"H x 1.75"D (1219mm x 914mm x 44mm)	120/240 VAC, 100W
SIL-5442	SIL-5442-KG	54"W x 42"H x 1.75"D (1372mm x 1067mm x 44mm)	120/240 VAC, 120W
SIL-6036	SIL-6036-KG	60"W x 36"H x 1.75"D (1524mm x 914mm x 44mm)	120/240 VAC, 120W
SIL-6642	SIL-6642-KG*	66"W x 42"H x 2"D (1676mm x 1067mm x 51mm)	120/240 VAC, 140W

*Silhouette with Keen (SIL-6642-KG) measures 66"W x 42" x 1.75" (1676mm x 1067mm x 44mm).

DIMENSIONAL DRAWING (Not to scale. Frost width may vary depending on mirror size.)

