



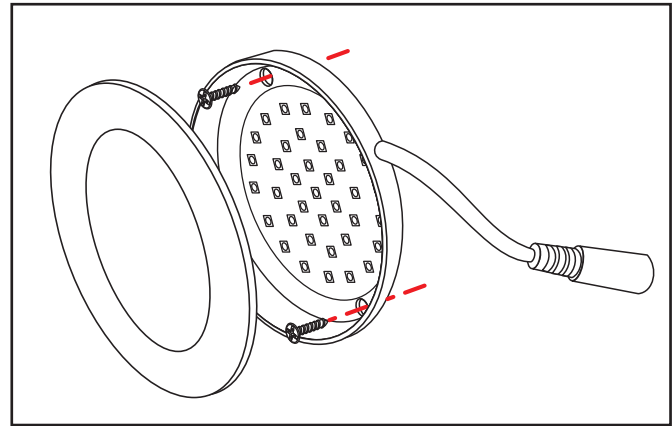

Satin Nickel fixture shown
L-UT-FR-SN-30

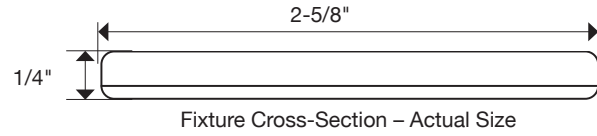

Surface mount only

MEDIUM LIGHT OUTPUT – 3 WATTS PER FIXTURE

| PART NUMBER | DESCRIPTION | DIMENSIONS | LUMENS PER FIXTURE Based on 4000K (approx. per fixture) | TOTAL WATTS PER FIXTURE | KELVIN TEMPERATURE |
|-------------------------|---|------------------------|---|----------------------------|--|
| L-UT-FR-SN- <i>Temp</i> | LED puck light designed for surface mount only. | 2-5/8" x 2-5/8" x 1/4" | 190 | 3 | 2700K (27) 3000K (30) 4000K (40) 5000K (50) |

Blue indicates customer choice. Temp indicates Kelvin Temperature.
L-UT-FR-SN-30 (Example part number for Vivid Ultra Thin Series puck light in 3000K)

INSTALLATION COMPONENTS

| PART NUMBER | DESCRIPTION | OUTSIDE DIAMETER |
|-----------------|---|------------------|
| T-CW20G-STR-25 | 25 ft. spool of 20/2 AWG stranded wire | 9/64" |
| T-CW20G-STR-50 | 50 ft. spool of 20/2 AWG stranded wire | 9/64" |
| T-CW20G-STR-100 | 100 ft. spool of 20/2 AWG stranded wire | 9/64" |
| T-CW20G-STR-1 | 20/2 AWG stranded wire sold per foot | 9/64" |

FINISH AVAILABLE



Satin Nickel (SN)



Puck Light Vivid Ultra Thin Series

Puck light with frosted, light diffusing lens



FEATURES

- 36 diodes per fixture
- Fully assembled fixture with female plug for easy installation
- 90 CRI (Color Rendering Index – true color)
- Simple surface mount installation
- 3-year limited warranty
- Designed for indoor application
- No UV or IR
- Dimmable (with compatible dimmer)
- 3 foot lead with end female barrel connector
- 30,000 hour LED life at 70% lumen maintenance
- 12 volt DC plug-in or hardwired power supply required (order separately)

APPLICATIONS

- Interior Cabinet
- Under Cabinet
- Display/Accent
- Over Sink
- Architectural Niche

TECHNICAL INFORMATION

| | |
|--------------------------------------|--|
| Series | Vivid Ultra Thin Series |
| Input Voltage | 12 volt DC |
| Color Temperature (Kelvin) | Warm white 2700K (27) Soft white 3000K (30) Cool white 4000K (40) Daylight white 5000K (50) |
| CRI (Color Rendering Index) | 90+ |
| LED Type | SMD2835 |
| Lumens | 190 lumens per fixture |
| Max Run | Refer to power supply specs |
| Cuttable | No |
| IP Rating | ----- |
| Dimmable | 5% – 100% |
| Rating | cULus Listed |
| Rated Life | 30,000 hrs |
| LED Beam Angle | 120° |
| LEDs Per Fixture | 36 |
| Mounting | Surface Mount |
| Wiring | 20/2 stranded |
| Operating Temperature | -13°F to 104°F (-25°C to 45°C) |
| Environment | Dry location |
| Construction Material | Aluminum |
| Warranty | 3 years |

COMPATIBLE POWER SUPPLIES

| PART NUMBER | DESCRIPTION | DIMENSIONS |
|------------------------|--|-------------------------------|
| T-12W-12V-PI | 12 watt AC/DC 2 prong plug-in, 12 volt DC 1 AMP. | 2-15/16" x 1-3/16" x 1-13/16" |
| T-24W-12V-PI | 24 watt AC/DC 2 prong plug-in, 12 volt DC 2 AMP. | 3-11/16" x 1-7/8" x 1-5/16" |
| T-36W-12V-PI | 36 watt AC/DC 2 prong plug-in, 12 volt DC 3 AMP | 3-3/4" x 2" x 1-5/16" |
| T-60W-12V-PI | 60 watt AC/DC 2 prong plug-in, 12 volt DC 5 AMP | 5-1/8" x 2-1/16" x 1-1/4" |
| T-96W-12V-PI | 96 watt AC/DC 3 prong plug-in, 12 volt DC 8 AMP. | 5-1/2" x 2-3/8" x 1-3/8" |
| T-120W-12V-PI | 120 watt AC/DC 3 prong plug-in, 12 volt DC 10 AMP | 6-3/8" x 2-11/16" x 1-1/4" |
| T-60W-12-WP-HW | 60 watt, 12 volt IP67 rated waterproof LED hardwired | 6-1/2" x 1-5/8" x 1-1/4" |
| T-150W-12-WP-HW | 150 watt, 12 volt IP67 rated waterproof LED hardwired. | 7-3/8" x 2-3/8" x 1-1/2" |
| T-DT24W-12V-HW | 24 watt 12 volt DC dimmable class 2 LED hardwired. | 13-3/4" x 3" x 1-5/8" |
| T-DT48W-12V-HW | 48 watt 12 volt DC dimmable class 2 LED hardwired | 13-3/4" x 3" x 1-5/8" |
| T-DT60W-12V-HW | 60 watt 12 volt DC dimmable class 2 LED hardwired | 13-3/4" x 3" x 1-5/8" |
| T-DT120W-12V-HW | 120 watt 12 volt DC dimmable LED hardwired | 15" x 3-1/8" x 2-1/2" |
| T-WAV-60W-PSR | 60 watt AC/DC 2 prong plug-in, 12 volt DC 5 AMP with built in smart LED receiver | 7-1/4" x 2-7/8" x 1-5/8" |
| T-320W-12V-HW | 320 watt 12 volt indoor industrial hardwired | 8-1/2" x 4-1/2" x 2" |

COMPATIBLE DIMMING SYSTEMS / SWITCHES

| PART NUMBER | DESCRIPTION | DIMENSIONS |
|---------------------------|--|---------------------------|
| T-Q-1Z-WC-RF-Color | Uno 1-Zone LED controller. On / Off / Dimmer. Use with LED Receiver. | 2-5/8" x 1-5/16" x 3/8" |
| T-Q-2Z-WC-RF-Color | Duo 2-Zone LED controller. On / Off / Dimmer. Use with LED Receiver. | 2-5/8" x 1-5/16" x 3/8" |
| T-Q-4Z-WC-RF-Color | Quattro 4-Zone LED controller. On / Off / Dimmer. Use with LED Receiver. | 2-5/8" x 1-5/16" x 3/8" |
| T-TWAV-WR-120 | WAV 120 watt smart LED Receiver. Use with a Wireless Controller | 4-1/4" x 2-1/4" x 3/8" |
| T-Q-WR96 | 96 watt LED Receiver. Use with a Wireless Controller | 3-3/8" x 1-1/2" x 13/16" |
| T-Q-WR240 | 240 watt LED Receiver. Use with a Wireless Controller. | 6-7/16" x 1-7/8" x 15/16" |
| T-DSS-30W-IR | Infrared (IR) door sensor switch. | 3/8" x 1" x 1-1/4" |
| T-2HDSS-30W-IR | Infrared (IR) door sensor switch with two heads | 3/8" x 1" x 1-1/4" |
| T-MSS-60W | Motion sensor switch | 1/2" x 2-1/4" |
| T-PSS-60W-IR | Infrared (IR) sensor proximity switch. | 2-1/4" x 3/8" |
| T-TDS-60W | LED touch dimmer. | 3/8" x 2" x 2" |
| T-WSS-60W-IR | Infrared (IR) wave sensor switch | 2-1/4" x 3/8" |
| DVLV-600P-Color | 600W Diva slide dimmer. | 4.69" x 2.94" x 1.31" |
| T-RS-BK | On / off round switch | 15/16" |
| T-WAV-AC120V-R | WAV 120 volt AC/AC Smart Receiver | 1-3/4" x 1-3/4" x 13/16" |