


# TASK lighting

## TR Series Angle Power Strip

**Tamper Resistant Duplex Receptacles** eliminate cutouts for receptacles and switches in your backsplash

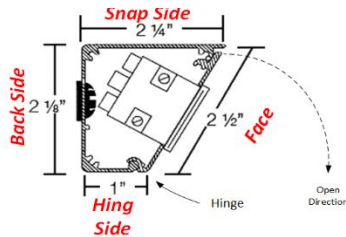

Left Side View

Part Number	Length	# of Duplex Recept.	Recept. Color	Finish
TR9-1ColorD-P-Finish	9"	1	B, G, W	BK, BZ, SN, WT
TR12-1ColorD-P-Finish	12"	1	B, G, W	BK, BZ, SN, WT
TR18-2ColorD-P-Finish	18"	2	B, G, W	BK, BZ, SN, WT
TR24-2ColorD-P-Finish	24"	2	B, G, W	BK, BZ, SN, WT
TR30-2ColorD-P-Finish	30"	2	B, G, W	BK, BZ, SN, WT
TR36-2ColorD-P-Finish	36"	2	B, G, W	BK, BZ, SN, WT
TR42-3ColorD-P-Finish	42"	3	B, G, W	BK, BZ, SN, WT
TR48-3ColorD-P-Finish	48"	3	B, G, W	BK, BZ, SN, WT
TR60-4ColorD-P-Finish	60"	4	B, G, W	BK, BZ, SN, WT
TR72-4ColorD-P-Finish	72"	4	B, G, W	BK, BZ, SN, WT
Custom lengths available	Lengths greater than 72" will have a seam., Use Multifunctional TR Series for custom.			

### FEATURES

- Tamper Resistant Duplex Receptacles
- Easy Installation
- Designer finishes to blend with any decor
- 3-Year Limited Warranty
- Custom options include: USB Ports, Switches, Drivers, Phone Jacks, Cable Jacks, Data Ports. See [Multifunctional TR Series](#) for more options.

### FINISHES & Standard Receptacle Color Combination



Black (BK) with Black (B) receptacles



Bronze (BZ) with Black (B) receptacles



Satin Nickel(SN) with Gray (G) receptacles



White (WT) with white (W) receptacles

### TR SERIES ANGLE POWER STRIP

### APPLICATIONS

- Kitchens
- Bedrooms
- Laundry Rooms
- Islands
- Offices
- Shops & Garages

### SPECIFICATIONS

Construction Materials: Powder Coated Aluminum

Input Voltage: 120V

Mounting: Wood Screws & Wall Anchors

Wiring: 12 ga. Romex

Environment: Dry Only

### RECEPTACLE COLORS



Black (B)



Gray (G)



White (W)

### OPTIONAL INSTALLATION COMPONENTS

PART NUMBER	DIMENSIONS	DESCRIPTION
TR-SQ-JB-P-Finish	3" x 3" x 2 1/8"	Square Junction Box




# TASK


lighting

## TR Series Angle Power Strip Tamper Resistant Duplex Receptacles Receptacle Layout


**TR72-4ColorD-Finish**

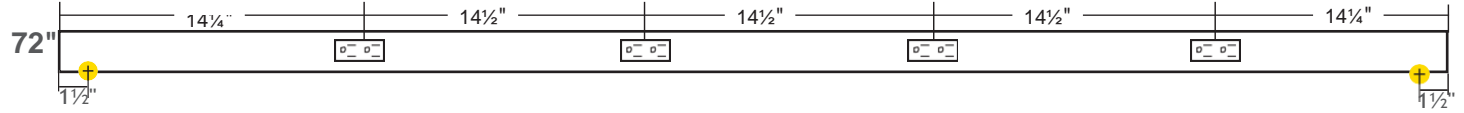


**TR60-4ColorD-Finish**

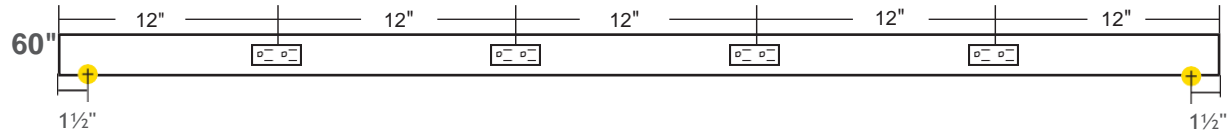


**TR48-3ColorD-Finish**

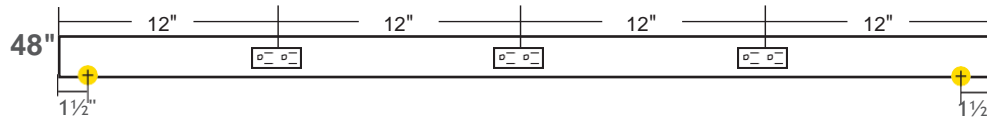


**TR42-3ColorD-Finish**

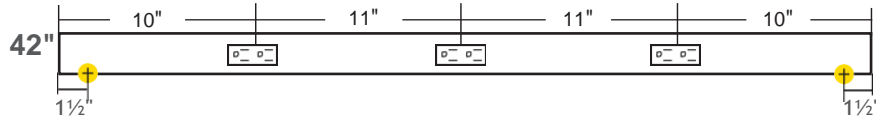


**TR36-2ColorD-Finish**

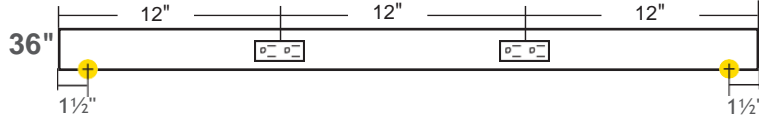


**TR30-2ColorD-Finish**

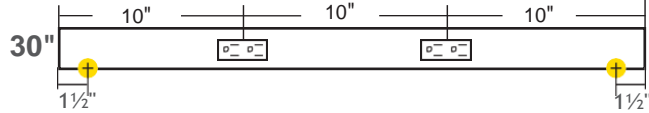


**TR24-2ColorD-Finish**

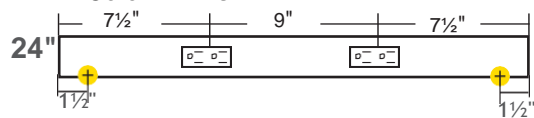


**TR18-2ColorD-Finish**

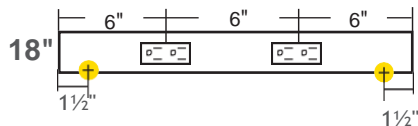

**TR12-1ColorD-Finish**

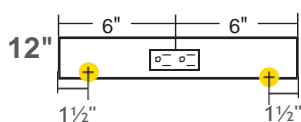

**TR9-1ColorD-Finish**



### LEGEND

- = Knock-out (all knock-outs are 1 1/2" from end)
- = Receptacle (15A receptacle standard)

### CUSTOM OPTIONS

- Custom lengths from 7" - 72" (larger sizes will have a seam when assembled)
- Use TR Series Multifunctional Accessories to build to your exact specifications & device placement

### CUSTOM OPTION DETAILS

- Receptacles must be a minimum of 5" apart (on center)
- Receptacles must be a min of 3 1/2" from end



# TASK lighting

## TR Series Angle Power Strip Custom Options

### Switches



TRO-DS-2SPS-W



TRO-3WS, TRO-4WS,  
TRO-SPS

### Receptacles



TRO-15A-REC




TRO-20A-REC

### Combination Devices



TRO-USB/REC



TRO-CB-1P/REC  
& TRO-CB-3P/REC

### Connectors



TRO-PJ




TRO-CJ



TRO-HDMI

### Port Frames



TRO-2PORT, TRO-3PORT, TRO-4PORT & TRO-6PORT

### Snap-in Connectors



TRO-CON-CJ



TRO-CON-PJ



TRO-CON-CAT5E

### Power Supply



TRO-TLD-D30WSO  
TRO-TLD-D45WSO  
TRO-TLD-D60WSO  
TRO-TLD-D75WSO

## TR SERIES CUSTOM OPTIONS

### CUSTOM LENGTHS

Custom lengths to the 1/4" from 7" - 72" (larger sizes will have a seam when assembled)

### SWITCHES

PART NUMBER	DESCRIPTION	COLOR
TRO-SPS-Color	Decora single-pole rocker switch	B, G, W
TRO-SPS-20A-Color	Decora 20 Amp single-pole rocker switch	B, G, W
TRO-3WS-Color	Decora 3-way rocker switch	B, G, W
TRO-3WS-20A-Color	Decora 20 Amp 3-way rocker switch	B, G, W
TRO-4WS-Color	Decora 4-way rocker switch	B, G, W
TRO-DS-2SPS-Color	Decora double switch	B, G, W
TRO-DS-(2)3WS-Color	Double switch with (2) 3-way	B, W
TRO-DS-1P/3P-Color	Double switch with single-pole & 3-way	B, G, W
TRO-TS-3SPS-Color	Decora triple switch w/ three single-pole switches	B, W

### RECEPTACLES

TRO-15A-REC	15 Amp tamper resistant receptacle	B, G, W
TRO-20A-REC	20 Amp tamper resistant receptacle	B, G, W

### RECEPTACLES/SWITCH COMBO

TRO-USB/REC	Combination (2) USB ports and receptacle	B, G, W
TRO-CB-1P/REC-Color	Combination single-pole switch and receptacle	B, G, W
TRO-CB-3P/REC-Color	Combination 3-way switch & receptacle	B, G, W

### CONNECTORS

TRO-CJ-Color	Decora style Cable Jack, "F" Style, for 75 Ohm coaxial cable	B, G, W
TRO-PJ-Color	Decora style 6 conductor telephone jack	B, G, W
TRO-HDMI-Color	HDMI Port Connector	W

### PORT FRAMES

TRO-2PORT-Color	Decora style multimedia insert. Allows you to combine your choice of 2, 3, 4, or 6 voice, data, audio, or video connectors into one compact, attractive wall plate	B, G, W
TRO-3PORT-Color		
TRO-4PORT-Color		
TRO-6PORT-Color		

### SNAP-IN CONNECTORS

TRO-CON-BLANK-Color	Blank insert cover any unused openings	B, G, W
TRO-CON-CAT5e-Color	Category 5e 8-conductor channel-rated connector 100 MHz	B, G, W
TRO-CON-CAT6-Color	Snap-in Data Category 6 8-conductor component-rated connector. 250 MHz	B, G, W
TRO-CON-CJ-Color	Snap-In cable jack.	B, G, W
TRO-CON-PJ-8-Color	6-conductor USOC voice grade phone (jack) connector	B, G, W

### POWER SUPPLIES

TRO-TLD-D30WSO	30W hardwire 15V DC
TRO-TLD-D45WSO	45W hardwire 15V DC
TRO-TLD-D60WSO	60W hardwire 15V DC
TRO-TLD-D75WSO	75W hardwire 15V DC
TRO-LPV-20W-15V	15V DC 20 Watt LED power supply
TRO-LPV-35W-15V	15V DC 35 Watt LED power supply



### Optional Information

- Alternate Circuits will have an Up Charge for first position wired to third, second to forth
- Space between driver and first device 3"
- Space on end for driver 6"
- TR Blanks available by foot
- Internal Driver space 9"
- Custom knockout(s) location specification. Must not be behind device
- Knockout Step bit 7/8" or use knockout punch
- TR-Low Voltage Divider separates 120V A/C from 15V DC
- Custom device layout and drawings available
- Additional devices can be added.
- Multifunctional TR configuration available on website
- Decora Punched Open size is 2 5/8" x 1 5/16"

